

Environmental Product Declaration



In accordance with ISO 14025:2006 and EN 15804:2012+A2:2019/AC:2021 for:

Convectors (WK2, WKS, WKI, WKH, WKHI, WKL, WKK, WRR, WRRH, WRRHI)

from

Watt Heating AB



Programme:	The International EPD® System, www.environdec.com
Programme operator:	EPD International AB
EPD registration number:	EPD-IES-0022658
Publication date:	2025-05-09
Valid until:	2030-05-08

EPD of multiple products based on average products and the material composition per kg does not change within the range. The included products are described in the production information.

An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at www.environdec.com



General information

Programme information

Programme:	The International EPD® System
Address:	EPD International AB Box 210 60 SE-100 31 Stockholm Sweden
Website:	www.environdec.com
E-mail:	info@environdec.com

Accountabilities for PCR, LCA and independent, third-party verification
Product Category Rules (PCR)
CEN standard EN 15804 serves as the Core Product Category Rules (PCR)
Product Category Rules (PCR): <i>Construction Products PCR 2019:14 version 1.3.4</i>
PCR review was conducted by: <i>The Technical Committee of the International EPD System. See www.environdec.com for a list of members. Review chair: Claudia A. Peña, University of Concepción, Chile. The review panel may be contacted via the Secretariat www.environdec.com/contact</i>
Life Cycle Assessment (LCA)
LCA accountability: <i>Fanni Végyvári, CarbonZero AB</i>
Third-party verification
Independent third-party verification of the declaration and data, according to ISO 14025:2006, via: <input checked="" type="checkbox"/> EPD verification by individual verifier Third-party verifier: <i>Vladimír Kočí, LCA Studio</i> Approved by: The International EPD® System
Procedure for follow-up of data during EPD validity involves third party verifier: <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but registered in different EPD programmes, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterisation factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.

Company information

Owner of the EPD:

Watt Heating AB
Transportvägen 7, 241 38 Eslöv, Sweden

E-mail: info@watt.se

Tel: +46 413 664 60

Website: www.watt.se

Responsible person: Mikael Andersson, mikael.andersson@watt.se

Description of the organisation:

Watt is a privately owned company within Climate Brand Group. Watt is a complete supplier of products for indoor climate supplied by water. Main customer focus is on installation companies like plumbers but also building companies and DIY. Watt's focus is on the Swedish market but also active in other Nordic countries. Watt products is always CE marked and tested according to EN442. We focus on good quality products to a very competitive price with high function and low environmental impact.

Name and location of production site: Brno, Czech Republic

Product information

Product name: Convector

Product description:

This EPD presents detailed results for the convector WK2. The WK2 convector is representative of the results for the full range of Watt Heating convectors mentioned in this EPD and include also the range of Radiator Robust. They are mostly made of low-alloyed steel, which is a material that can be reused countless times. This makes convectors a good environmental option in the long term. It has a lifespan of at least 50 years and therefore makes a great product to use in both new buildings and buildings facing renovations. The convectors meet all the requirements and standards within the EU and industry, such as EN-442-1:2014.

The thermostat on the convectors is excluded from calculations.

Description of production process:

The entire production of the convectors occurs in Brno, Czech Republic and the finished products are delivered to Eslöv before delivery to Watt costumers. The production process involves rectangular steel profiles being welded and painted (preparing treatment, painting and drying), before the products are packed for delivery to Sweden.

UN CPC code: 44823 – Radiators for central heating, not electrically heated, of iron or steel

Geographical scope: Europe; Czech Republic for manufacturing and Sweden for distribution and end-of-life.

Products included:

This EPD covers the full range of convectors manufactured in Czech Republic. The EPD presents detailed results for the convectors. The WK2 convector is representative for the full range of Watt Heating convectors, since the material composition per kg of product is the same over the entire product range.

The included variants are presented in the table below.

Product name (Swedish)	Abbreviation	Link to website
Watt Konvektor 2	WK2	https://watt.se/produkter/konvektorer/wk2
Watt Konvektor Standard	WKS	https://watt.se/produkter/konvektorer/wks
Watt Konvektor Integrerad	WKI	https://watt.se/produkter/konvektorer/wki
Watt Konvektor Hygien	WKH	https://watt.se/produkter/konvektorer/wkh
Watt Konvektor Hygien Integrerad	WKHI	https://watt.se/produkter/konvektorer/wkhi
Watt Konvektor Klimatlist	WKL	https://watt.se/produkter/konvektorer/wkl
Watt Kyrkbänkskonvektor	WKK	https://watt.se/produkter/konvektorer/wkk
Watt Radiator Robust	WRR	https://watt.se/produkter/radiatorer/wrr
Watt Radiator Robust Integrerad	WRRi	https://watt.se/produkter/radiatorer/wrri
Watt Radiator Robust Hygien	WRRH	https://watt.se/produkter/radiatorer/wrrh
Watt Radiator Robust Hygien Integrerad	WRRHi	https://watt.se/produkter/radiatorer/wrrhi

All the products have the same material composition per kg, hence no variations between the products.

LCA information

Declared unit: 1 kg of convector

Reference service life: Not applicable


Time representativeness: 2023

Database(s) and LCA software used: Calculation completed in LCA for Experts v.10.7, with the database version 2024.1 and with some ecoinvent datasets (version 3.8). The characterization factors used in this study refer to PCR 2019:14 and EN 15804+A2 (based on EF 3.1).

Description of system boundaries:

Cradle to gate with options, modules C1–C4, module D and with optional modules (A1–A3 + C + D and additional modules A4+A5).

System diagram:

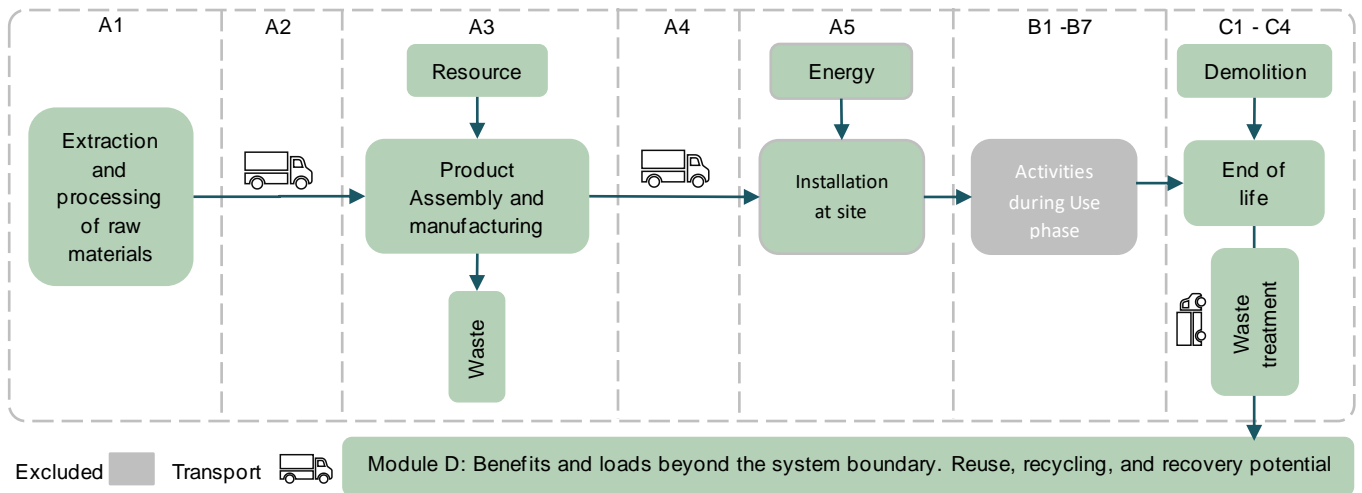

More information – methodology and assumptions:

A1-A3 –Product stage

The upstream stage of the LCA is subdivided into “Raw material supply”, “Transport” and “Manufacturing” modules. Data collection for specific data represents the production year of 2023 and the specific data used from specific supplier EPD and datasets which represent the last 5 years as the oldest data is from 2021. Please note that modules A1-A3 is representative of supplier EPD for the convectors manufactured in Czech Republic.

A1 – Raw material supply

This module considers the extraction and processing of all raw materials, energy, and transportation which occur upstream of the studied manufacturing process. The products are made from steel and covered with powder paint.

A2 – Transport to the manufacturer

This module includes the transportation of raw materials to the manufacturing site. Specific information from the manufacturer was obtained regarding the transportation distance between the suppliers to the manufacturing factory.

A3 - Manufacturing

This module includes all resources used during the production of the convectors, mainly electricity and natural gas, and it also includes the production of packaging material in which the products are transported to customers. The manufacturer has collected data from the production year of 2023. As there's only one manufacturing site, no variation in production sites occurs.

A4 – Transport

This stage includes transportation from the manufacturing site in Brno, Czech Republic to Watt Heating in Eslöv (1 025 km). An additional 500 km is considered for transport to the building site or customers, who are located within Sweden.

Transport to the building site

Scenario information	Unit per declared unit
Fuel type and consumption of vehicle or vehicle type used for transport e.g. long-distance truck, boat, etc.	Truck-trailer, Euro 0 - 6 mix, < 40t gross weight
Distance	1 525 km
Capacity utilisation (including empty returns)	61%
Volume capacity utilisation factor (factor: =1 or <1 or ≥ 1 for compressed or nested packaged products)	Not applicable

A5 – Construction installation

The installation of the products is taking place with an electric drilling machine and the impact from this action is expected to be below the cut-off boundary and is therefore excluded. In addition to the installation, the waste treatment of packaging is included here since this is where the packaging leaves the product system.

The following disposal routes were used for packaging, based on Swedish statistics (2020).

Material	Recycling rate	Incineration rate	Landfill rate
Cardboard	0%	100%	0%
Plastic	26%	74%	0%

B1-B7 – Use stage

This stage is not declared.

C1 Deconstruction/Demolition

This stage includes the deconstruction of the product when it no longer is in use. In this study the deconstruction happens by hand using an electric drill machine for which the impact is considered as negligible.

C2 Transport

This module represents the transport distance to the waste processing facility. It is assumed that the transportation distance to the waste processing facility is 50 km.

C3 Waste processing

This module includes any waste treatment needed. Swedish statistics is used to assign the different materials to the appropriate waste treatment process.

The following waste treatment rates were used. The powder coating is assumed to be incinerated within the steel recycling process.

Material	Recycling rate	Incineration rate	Landfill rate
Steel	95%	0%	5%
Powder coating	0%	100%	0%

C4 Disposal

This module includes any material that is landfilled. For this product, it is the non-recyclable part of steel.

Process	Unit (expressed per declared unit)
Collection process specified by type	1 kg collected separately
	0 kg collected with mixed construction waste
Recovery system specified by type	0 kg for re-use
	0.9405 kg steel for recycling
	0.001 kg powder coating for energy recovery
Disposal specified by type	0.0495 kg steel for final deposition
Assumptions for scenario development, e.g. transportation	The transportation is modelled with the same specification as the truck transportation in module A2, except for the transportation distance that is set to 50 km.

D Benefits and loads beyond the system boundary

This module includes loads and benefits obtained from energy recovery and or recycling materials. For this product it is mainly the recycling of metals that leads to recovered metals so that production of virgin metal is avoided, or the energy recovered from incineration removing electricity and heat being produced elsewhere. Swedish electricity grid mix and process steam from natural gas is used for crediting the heat produced.

Infrastructure

The plants, production of machines and transportation systems are excluded from the calculations. However, electricity is one such input for which it is not possible to exclude the impact from infrastructure already included in the dataset, but no data on infrastructure has been manually added to the product system.

Cut-off criteria

The following procedures were followed for the exclusion of inputs and outputs

- All input and output flows in a unit process were considered i.e., taking into account the value of all flows in the unit process and the corresponding LCI where data was available
- Processes of infrastructure or capital goods are excluded from this study (except when it is already included in a dataset used)
- Generic national data was used for modules C1-C4 and D, as no specific data was able to be collected
- The use of cut-off criterion on mass inputs and primary energy at the unit process level (1%) and at the information module level (5%) was applied

No hazardous and toxic materials or Substances of Very High Concern (SVHC) according to REACH is included in the inventory, and the cut-off rules do not apply.

Allocation

Allocation criteria are based on mass.

Modules declared, geographical scope, share of specific data (in GWP-GHG results) and data variation (in GWP-GHG results):

	Product stage			Construction process stage		Use stage							End of life stage				Resource recovery stage
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Modules declared	X	X	X	X	X	ND	ND	ND	ND	ND	ND	ND	X	X	X	X	X
Geography	GLO	GLO	CZ	EU	SE	-	-	-	-	-	-	-	SE	SE	SE	SE	SE
Specific data used	66*%			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – products	0%			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – sites	0%			-	-	-	-	-	-	-	-	-	-	-	-	-	-

*This value is taken from the EPD that represents the manufacturing of the convectors. The data is further taken from specific information about the manufacturing of steel.

Content information

Product components	Weight, kg	Post-consumer material, weight-%	Biogenic material, weight-% and kg C/ declared unit
Steel	9,90E-01	18**	0 resp. 0
Powder coating	1,00E-02	0	0 resp. 0
TOTAL	1,00E+00	0	0 resp. 0
Packaging materials	Weight, kg	Weight-% (versus the product)	Weight biogenic carbon, kg C/ declared unit
Cardboard	4,00E-02	4,0	0,42
LDPE	4,00E-03	0,4	0 resp. 0
HDPE	2,00E-03	0,2	0 resp. 0
TOTAL	4,60E-02	4,6	0,42

The content declaration shows the content of the representative product, as suggested in PCR.

**Based on steel supplier's EPD; post-consumer and pre-consumer are not distinguishable

Dangerous substances from the candidate list of SVHC for Authorisation	EC No.	CAS No.	Mass-% per functional or declared unit
Not relevant.			

Results of the environmental performance indicators

The estimated impact results in this section are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks. Furthermore, the results of the end-of-life stage (module C) should be considered when using the results of the production stage (modules A1-A3).

Mandatory impact category indicators according to EN 15804

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP-total	kg CO ₂ eq.	3,59E+00	3,59E-02	1,20E-01	0,00E+00	3,59E-03	1,61E-03	2,33E-03	-1,65E+00
GWP-fossil	kg CO ₂ eq.	3,69E+00	3,59E-02	1,57E-02	0,00E+00	3,59E-03	1,61E-03	2,32E-03	-1,65E+00
GWP-biogenic	kg CO ₂ eq.	-1,04E-01	2,17E-05	1,04E-01	0,00E+00	5,95E-08	3,24E-06	3,43E-06	3,23E-04
GWP-luluc	kg CO ₂ eq.	2,55E-03	2,02E-06	2,42E-06	0,00E+00	2,02E-07	1,82E-07	3,43E-06	-9,13E-04
ODP	kg CFC 11 eq.	1,75E-07	8,37E-09	4,47E-12	0,00E+00	8,37E-10	2,57E-11	3,64E-15	1,96E-12
AP	mol H ⁺ eq.	1,18E-02	1,06E-04	1,91E-05	0,00E+00	1,06E-05	1,50E-05	7,24E-06	-3,96E-03
EP-freshwater	kg P eq.	6,27E-04	3,83E-07	8,03E-08	0,00E+00	3,83E-08	4,96E-08	1,59E-09	-4,47E-07
EP-marine	kg N eq.	2,72E-03	3,12E-05	6,90E-06	0,00E+00	3,12E-06	6,94E-06	1,86E-06	-6,43E-04
EP-terrestrial	mol N eq.	2,87E-02	3,43E-04	8,49E-05	0,00E+00	3,43E-05	7,54E-05	2,04E-05	-5,80E-03
POCP	kg NMVOC eq.	8,84E-03	7,79E-05	1,84E-05	0,00E+00	7,79E-06	2,23E-05	5,65E-06	-2,59E-03

ADP-minerals&metals*	kg Sb eq.	2,84E-05	6,49E-09	2,17E-09	0,00E+00	6,49E-10	5,64E-10	7,45E-11	-9,07E-06
ADP-fossil*	MJ	4,39E+01	5,11E-01	2,57E-02	0,00E+00	5,11E-02	2,11E-02	1,78E-02	-1,70E+01
WDP*	m ³	2,10E+00	5,40E-04	8,39E-03	0,00E+00	5,40E-05	7,13E-05	2,81E-04	-1,12E-01
Acronyms	GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption								

* Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.

Additional mandatory and voluntary impact category indicators

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP-GHG ¹	kg CO ₂ eq.	3,70E+00	3,59E-02	1,57E-02	0,00E+00	3,59E-03	1,61E-03	2,32E-03	-1,65E+00
PM	Disease incidence	4,97E-08	5,51E-10	1,88E-10	0,00E+00	5,51E-11	4,13E-10	8,01E-11	-3,72E-08
IRP**	kBq U235 eq.	1,98E-01	2,32E-03	1,67E-04	0,00E+00	2,32E-04	1,00E-05	3,58E-05	2,17E-02
ETP-fw*	CTUe	6,46E+00	1,37E-01	1,11E-02	0,00E+00	1,37E-02	9,93E-03	1,34E-02	-8,70E-01
HTTP-c*	CTUh	1,46E-09	2,20E-12	1,76E-12	0,00E+00	2,20E-13	5,15E-13	2,43E-13	6,40E-10
HTTP-nc*	CTUh	1,32E-08	3,97E-11	1,35E-11	0,00E+00	3,97E-12	3,53E-12	8,12E-12	2,99E-09
SQP*	Dimensionless	1,00E+01	6,24E-02	1,01E-02	0,00E+00	6,24E-03	1,41E-03	3,03E-03	-4,74E-01

* The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.

** This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

¹ This indicator accounts for all greenhouse gases except biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. As such, the indicator is identical to GWP-total except that the CF for biogenic CO₂ is set to zero.

Resource use indicators

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
PERE	MJ	6,77E+00	1,34E-03	5,28E-03	0,00E+00	1,34E-04	1,20E-04	2,95E-03	1,60E-01
PERM	MJ	6,28E-06	0,00E+00	-8,00E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PERT	MJ	6,77E+00	5,11E-01	-7,95E-01	0,00E+00	5,11E-02	2,11E-02	1,78E-02	-1,70E+01
PENRE	MJ	4,76E+01	0,00E+00	2,57E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PENRM	MJ	2,57E-08	0,00E+00	-2,76E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PENRT	MJ	4,76E+01	0,00E+00	-2,50E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
SM	kg	2,66E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
RSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
FW	m ³	8,04E-02	1,26E-05	1,97E-04	0,00E+00	1,26E-06	1,66E-06	7,35E-06	-1,62E-01
Acronyms	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water								

Waste indicators

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
Hazardous waste disposed	kg	9,37E-02	0,00E+00	9,97E-12	0,00E+00	0,00E+00	0,00E+00	4,00E-12	-1,22E-07
Non-hazardous waste disposed	kg	5,99E-01	0,00E+00	1,84E-03	0,00E+00	0,00E+00	0,00E+00	4,97E-02	1,90E-01
Radioactive waste disposed	kg	1,71E-03	0,00E+00	9,86E-07	0,00E+00	0,00E+00	0,00E+00	2,64E-07	-1,18E-04


Output flow indicators

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
Components for re-use	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Material for recycling	kg	5,30E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for energy recovery	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy, electricity	MJ	0,00E+00	0,00E+00	1,15E-01	0,00E+00	0,00E+00	0,00E+00	1,40E-03	0,00E+00
Exported energy, thermal	MJ	0,00E+00	0,00E+00	2,08E-01	0,00E+00	0,00E+00	0,00E+00	2,63E-03	0,00E+00

Additional requirements

Electricity mix from the use of electricity in manufacturing.

Generation of electricity consumed within the manufacturing factory was based on the Czech residual electricity grid mix. GWP-GHG indicator of the used residual electricity grid mix is 0,64 kg CO₂ eq./kWh.

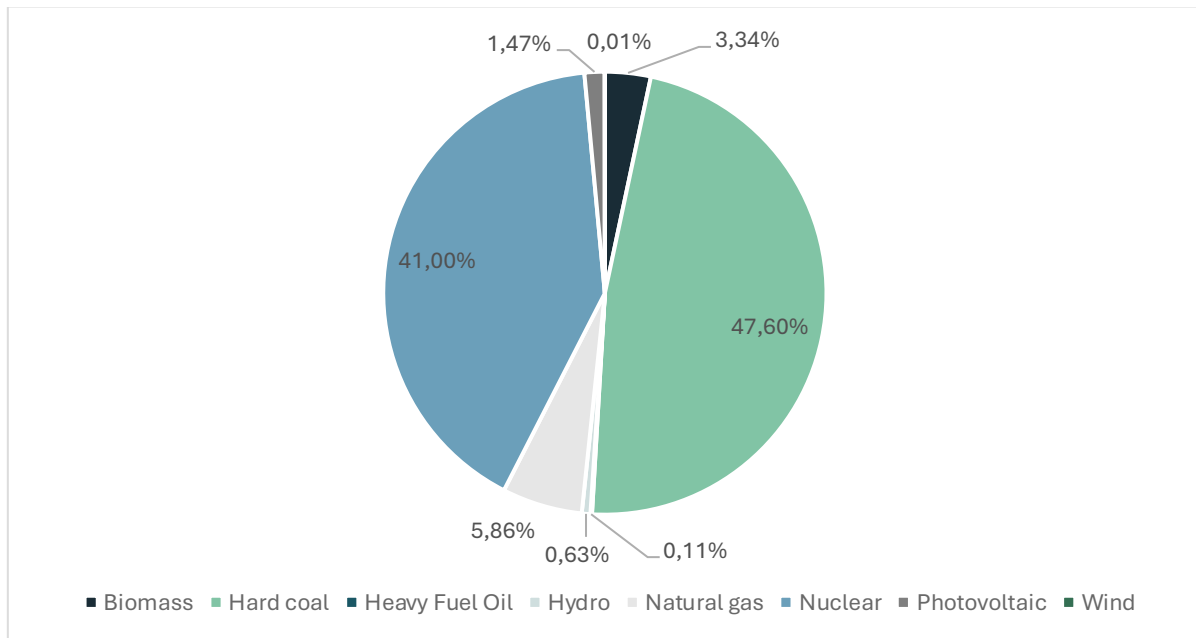





Czech Republic Energy mix

References

EN 15804:2012+A2	Sustainability of construction works – Environmental product declaration – Core rules for the product category of constructions products
EPD International (2024)	General Programme Instructions of the International EPD® System, version 4.0
ISO 14020:2022	International Standard ISO 14020 – Environmental statements and programmes for products – Principles and general requirements
ISO 14025:2006	International Standard ISO 14025 – Environmental labels and declarations — Type III environmental declarations — Principles and procedures
ISO 14040:2006	International Standard ISO 14040: Environmental Management – Life cycle assessment – Principles and framework. Second edition 2006-07-01.
ISO 14044:2006	International Standard ISO 14044: Environmental Management – Life cycle assessment – Requirements and Guidelines.
PCR 2019:14	Construction products v1.3.4
SCB 2020	Treated waste by treatment category and waste category. Every second year 2010-2020. (Retrieved 2025-04-08)

Contact Information

EPD owner:	 Email: info@watt.se Address: Transportvägen 7, 241 38 Eslöv, Sweden
LCA author:	 Fanni Végvári Email: fanni.vegvari@carbonzero.se Address: Tåstrupsgatan 2, SE-262 63 Ängelholm, Sweden
Third-party verifier:	 Vladimír Kocí Email: Vladimír.Koci@lcastudio.cz Address: LCA Studio, Šárecká 1962/5, 160 00 Praha 6, Czech Republic
Program operator:	 THE INTERNATIONAL EPD® SYSTEM EPD International AB Email: info@environdec.com Telephone: +46 (0)73 311 30 20 Address: SE-11427 Stockholm, Sweden

